



Specifications

Nominal torque	35	N.m	<i>ft.lbf</i>	26
Minimal torque	0.33	N.m	<i>ft.lbf</i>	0.25
Coil resistance - 20°C			<i>W</i>	19
Rated current DC			<i>A</i>	1
Rotor inertia	0.79.10 ⁻³	kg.m ²	<i>lb.ft²</i>	18.4 10⁻³
Weight	6.8	kg	<i>lb</i>	15
Heat dissipation continuous sustained depending on external part rotation speed	<i>W *</i>	200	800	1300
	(RPM)	0	1000	2000




* Heat dissipation is the mechanical power ($P = c_w$) maximum allowable.

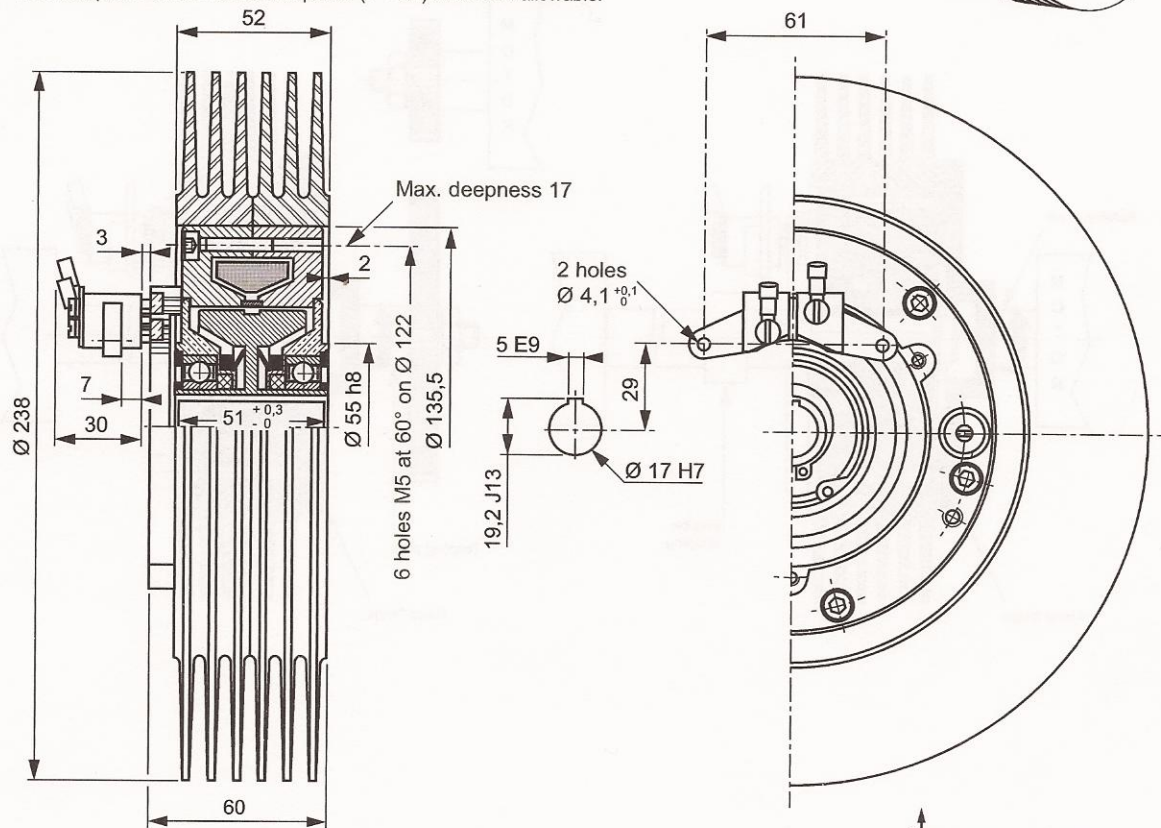

Application Notes

- Mounting must be made without any stress.
Lubricated for life (other internal lubrication not allowed).
The shaft should be lubricated upon assembly, to prevent seizing.
- Low DC current power supply for coil.
- The standard device is designed for horizontal shaft orientation, and a minimal speed of 60 RPM. Maximum speed is 2000 RPM (without exceeding the max. heat dissipation capability).
- For Engineering application, please contact our technical support.
- In normal use, the outside temperature of the device can increase up to 100°C, without damage.

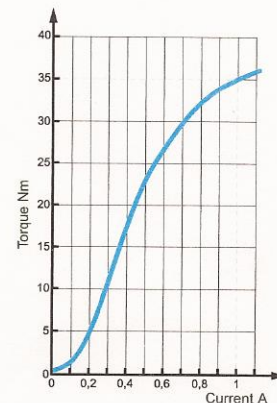


Safety

- If the device is to be used in dusty, humid or corrosive environment, special protection needs to be considered.

Recommended mounting principles

In line mounting

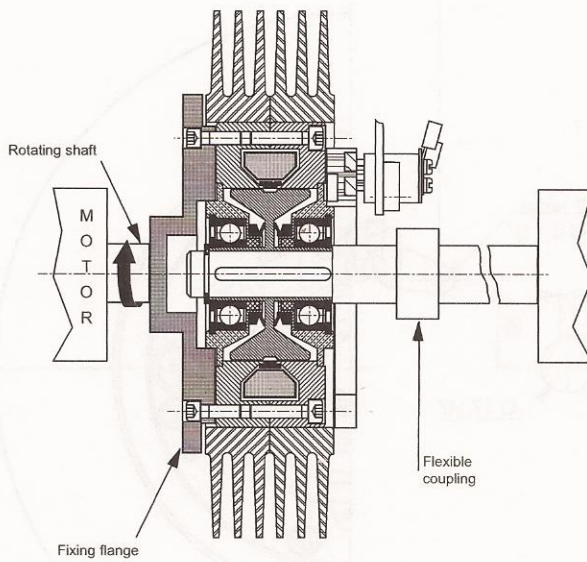

Parallel mounting

